

HALENSAS – 2017Q4 2018Q1 Summary on Good and Bad Practices 安全稽核結果

Occupational Safety and Health Council
職業安全健康局



Executive Summary

1. Working at height, housekeeping, falling objects and electrical installations still remain **the key problems** in HA sites
2. Provision of proper working platforms and safe means of access to workplace are the major areas need to be improved by contractors
3. Poor housekeeping remains unsatisfactory and needs special attention.
4. Protection against electrical safety should be improved

1. 高空工作，工地整理，高空墮物及電力工作仍然是主要問題
2. 提供工作平台及安全進出口是主要改善項目
3. 工地整理表現未如理想，須多加注意
4. 改善電力安全

內容 Content

- GOOD PRACTICE 良好作業方式
- BAD PRACTICE 不良作業方式

GOOD PRACTICE 良好作業方式

- Platform with guard-rails and toe-boards
- 安裝圍欄及踢腳板



GOOD PRACTICE 良好作業方式

- Steel mesh is provided in lift machine room.
- 轆機房已加上金屬網



GOOD PRACTICE 良好作業方式

- Safe working procedure was posted on the lift shaft gate.
- 張貼安全工作守則



GOOD PRACTICE 良好作業方式

- Hand tools were attached with hand string
- 手工具連接手帶



GOOD PRACTICE 良好作業方式

- Materials storage area was tidy
- 物料存放整齊




GOOD PRACTICE 良好作業方式

- Lift pit was clean and tidy
- 井底保持整齊清潔



GOOD PRACTICE 良好作業方式

- Winch with effective guarding
- 絞車安裝有效護罩

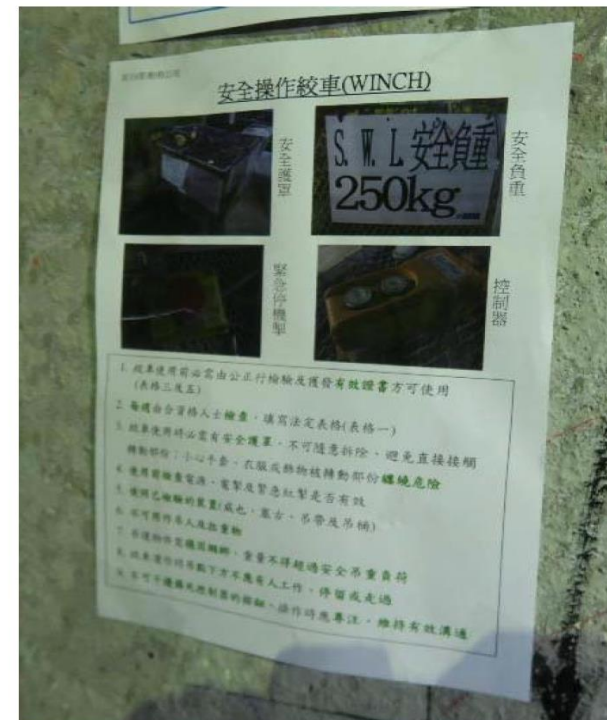

The END

Thank You!

Here is the footage of
Site Safety Seminar for Capital Works New Works Contracts
of Housing Authority which was held on 12 April 2018
The speaker is Senior Consultant of
Occupational Safety and Health Council
Mr. Jack FONG
His presentation topic is
Housing Authority Lift and Escalator Nominated Sub-contracts
Safety Auditing System (HALENSAS) Version 1.1.1
Findings of the 4th quarter of 2017 and the 1st quarter of 2018

(00:36)

These photos refer to the situation
of the Housing Authority Lift and Escalator Nominated
Sub-contracts Safety Auditing System
Generally, protection was provided
at the lift well for controlling access
For example, there were railing and toe boards
and the access paths were in satisfactory condition
In addition, there were also some metal plates
sealing the gaps in the plant room
Safe working procedure was also posted
In addition, there were also hand-held tools with hand straps
The storage of materials was tidy
and the wells were clean and in satisfactory condition
Some winches were adequately protected
and safe working procedure of the winch
was also posted on the site
That's it for my sharing today
Thank you

Thank you for watching

(01:34)